



BLS- X X + Terminal series

■ 壳体 HOUSING

◆ 材料 Material: PPO UL 94V-0 & Nylon 66 UL 94V-0

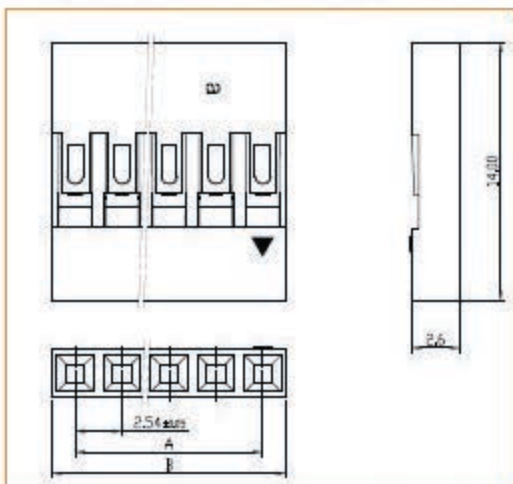

● B-Type:

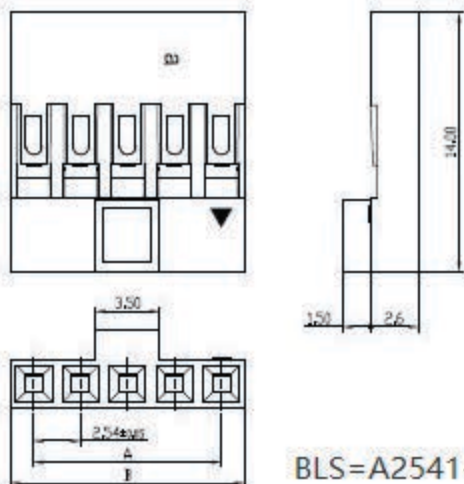


BLS=A2541-H

Poles	Part No.	Part No.	Dimensions mm	
			A	B
1	A2541-H01			2.54
2	A2541-H02		2.54	5.08
3	A2541-H03	A2541-HB03	5.08	7.62
4	A2541-H04	A2541-HB04	7.62	10.16
5	A2541-H05	A2541-HB05	10.16	12.70
6	A2541-H06	A2541-HB06	12.70	15.24
7	A2541-H07	A2541-HB07	15.24	17.78
8	A2541-H08	A2541-HB08	17.78	20.32
9	A2541-H09	A2541-HB09	20.32	22.86
10	A2541-H10	A2541-HB10	22.86	25.40
11	A2541-H11	A2541-HB11	25.40	27.94
12	A2541-H12	A2541-HB12	27.94	30.48
13	A2541-H13	A2541-HB13	30.48	33.02
14	A2541-H14	A2541-HB14	33.02	35.56
15	A2541-H15	A2541-HB15	35.56	38.10
16	A2541-H16	A2541-HB16	38.10	40.64
17	A2541-H17	A2541-HB17	40.64	43.18
18	A2541-H18	A2541-HB18	43.18	45.72
19	A2541-H19	A2541-HB19	45.72	48.26
20	A2541-H20	A2541-HB20	48.26	50.80
21	A2541-H21	A2541-HB21	50.80	53.34
22	A2541-H22	A2541-HB22	53.34	55.88
23	A2541-H23	A2541-HB23	55.88	58.42
24	A2541-H24	A2541-HB24	58.42	60.96
25	A2541-H25	A2541-HB25	60.96	63.50
26	A2541-H26	A2541-HB26	63.50	66.04
27	A2541-H27	A2541-HB27	66.04	68.58
28	A2541-H28	A2541-HB28	68.58	71.12
29	A2541-H29	A2541-HB29	71.12	73.66
30	A2541-H30	A2541-HB30	73.66	76.20
31	A2541-H31	A2541-HB31	76.20	78.74
32	A2541-H32	A2541-HB32	78.74	81.28
33	A2541-H33	A2541-HB33	81.28	83.82
34	A2541-H34	A2541-HB34	83.82	86.36
35	A2541-H35	A2541-HB35	86.36	88.90
36	A2541-H36	A2541-HB36	88.90	91.44
37	A2541-H37	A2541-HB37	91.44	93.98
38	A2541-H38	A2541-HB38	93.98	96.52
39	A2541-H39	A2541-HB39	96.52	99.06
40	A2541-H40	A2541-HB40	99.06	101.60


规格	>0~3	>3~18	>18~50	>50~120
公差	±0.12	±0.15	±0.3	±0.5

■ 端子 TERMINAL

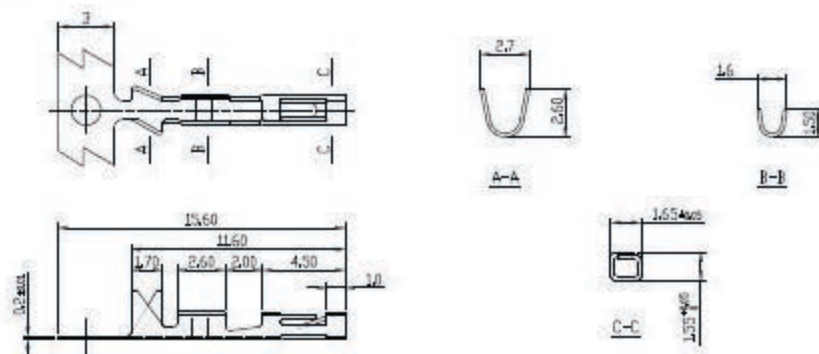

Wire Range	Insulation O.D	Material	Finish
AWG #26 to #22	1.2 to 1.6mm	Phosphor bronze	Tin-plated
AWG #26 to #22	1.2 to 1.6mm	Phosphor bronze	Gold.Ni.plated

■ 端子 TERMINAL

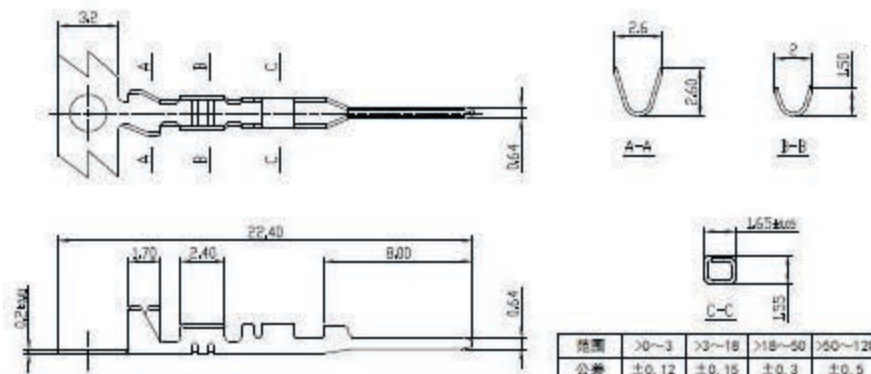

规格	>0~3	>3~18	>18~50	>50~120
公差	±0.12	±0.15	±0.3	±0.5

RUI CHI