
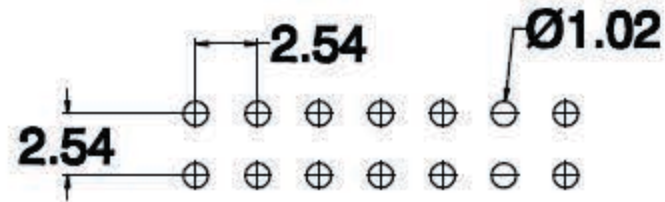


1 2 3 4 5 6 7 8 9

G

G

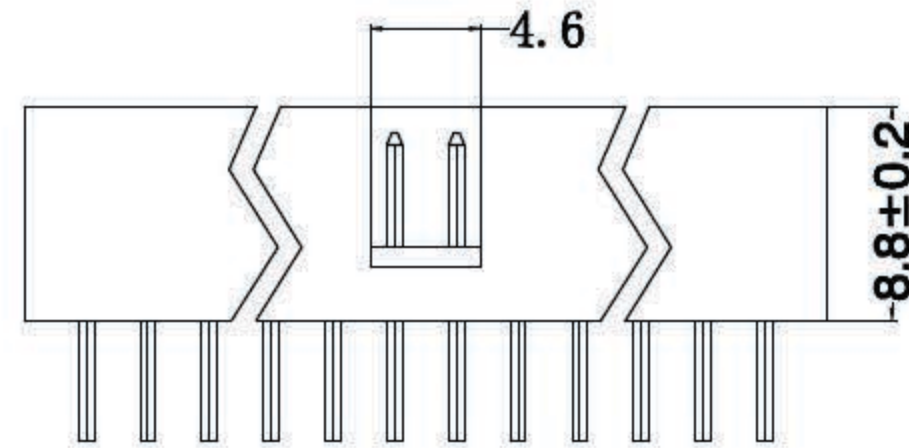

**SPECIFICATIONS**



- Current Rating: 3Amps
- Insulation Resistance: 1000MΩ min
- Withstanding Voltage: 1000VAC
- Contact Resistance: 20mΩ max
- Operating Temperature: -40° C to +105° C
- Standard: PBT
- Contact Material: Brass
- Contact Plating: Au or Sn Over Ni
- Max. Processing Temp: 180 °C for 30-60 second  
(200 °C for 10 second)

F

F

E

E

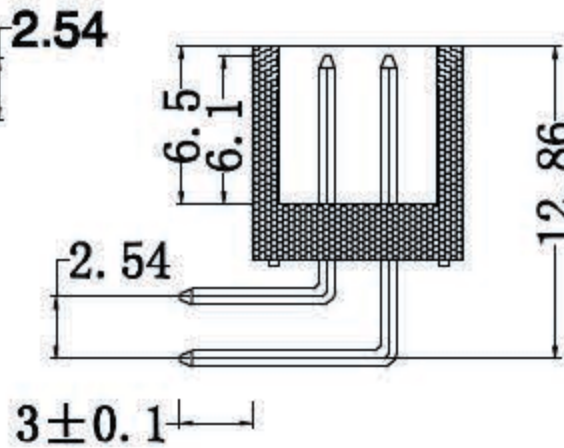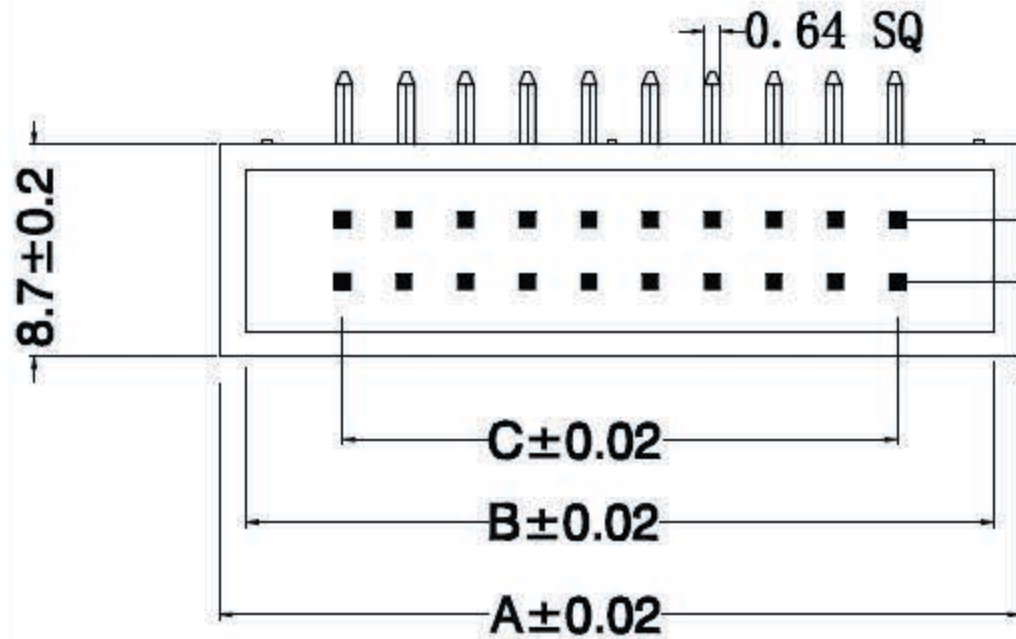

- (1) Pin Spacing: 254=2.54mm
- (2) Product Name: BH=Box Header
- (3) No. of Pins Per Row: 6-64
- (4) Insulator Material Height: 88=8.8mm
- (5) Contact Type: S=Straight; R=Right/Angle; M=SMT
- (6) Contact Plating: SN=Tin; GO=Gold Flash; SO=Gold Flash/Tin; AU08=Au0.8u''
- (7) Insulator Material Option:  
A=BK-PBT; B=BK-PA6T; C=BK-PA46; D=BK-LCP; S=Special

D

D

C

C

# Shenzhen Rui Chi electronic Co., Ltd

No. of	DIN. A	DIN. B	DIN. C	No. of	DIN. A	DIN. B	DIN. C	No. of	DIN. A	DIN. B	DIN. C
6	15.22	13.02	5.08	26	40.62	38.42	30.48	46	66.02	63.82	55.88
8	17.76	15.56	7.62	28	43.16	40.96	33.02	48	68.56	66.36	58.42
10	20.30	18.10	10.16	30	45.70	43.50	35.56	50	71.10	68.90	60.96
12	22.84	20.64	12.70	32	48.24	46.04	38.10	52	73.64	71.44	63.50
14	25.38	23.18	15.24	34	50.78	48.58	40.64	54	76.18	73.98	66.04
16	27.92	25.72	17.78	36	53.32	51.12	43.18	56	78.72	76.52	68.58
18	30.46	28.26	20.32	38	55.86	53.66	45.72	58	81.26	79.06	71.12
20	33.00	30.80	22.86	40	58.40	56.20	48.26	60	83.80	81.60	73.66
22	35.54	33.34	25.40	42	60.94	58.74	50.80	62	86.34	84.14	76.20
24	38.08	35.88	27.94	44	63.48	61.28	53.34	64	88.88	86.68	78.74

B

B

UNLESS OTHERWISE SPECIFIED TOLERANCE		DRAWN NAME: BH-X X R (IDC-X X MR) series									
X	: ±0.3	X°	: ±5°	SIZE	A4	SCALE	N:1	PROUCT			
X.X	: ±0.2	X.X°	: ±1°	REV	A	UNIT	mm	PROJECT	⊕	PAGE	1/1
X.XX	: ±0.2	X.XX°	: ±0.5°	CHECKED	LIU SHENG HUI	DATE	05/28	CHECKED	DATE /		

A

A

1 2 3 4 5 6 7 8 9