


N: NUMBER OF CONTACTS

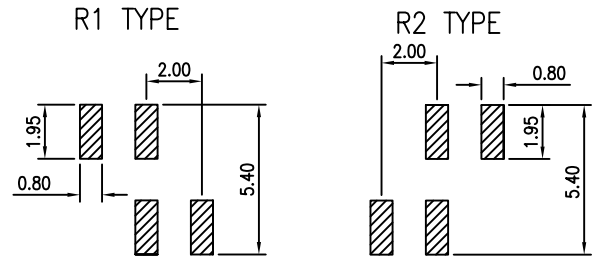

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/17/05'		

NOTES:

- MATERIAL&FINISHES
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT MATERIAL: COPPER ALLOY.
- SPECIFICATION
 - CURRENT RATING:1.5 Amp.
 - INSULATION RESISTANCE:1000MΩ Min.
 - DIELECTRIC WITHSTANDING:600VAC.
 - CONTACT RESISTANCE:20mΩ Max.
 - OPERATING TEMPERATURE:-20°C TO +80°C.
- PART NUMBER: DS1025-03
- PRODUCT NUMBER CODE:

DS1025-03 - X X X X X X X

TABLE A:

TYPE	Dimension			Pin Length (mm)
	A	B	C	
1	4.00	2.50	4.40	8.05
2				
3				
4				
5				
6				
3				
4				
5				
6				

普通

- CONTACT TYPE
1: R1 TYPE
2: R2 TYPE
- Dim. A B C TYPE
1: TYPE 1
- CONTACTS TYPE
S:SMT TYPE
- HOUSING COLOR
B:BLACK
- CONTACT PLATING
8: FULL GOLD FLASH
- CONNECTOR TYPE
P:PLUG
- No.OF CONTACTS
1*2-1*X
- SERIES No.
DS1025-03

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	SINGLE ROW S.M.T	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1025-03 SERIES	
.XX	±0.25	.XX	±2°	PLS2 1x40S1 1025-03				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET		1 OF 1			
DRAWING NO.		C-DS1025-03-XXXXXXX						